

标准要求:

&符合 IEEE 802.3an标准

&符合ROHS标准

&电感:350uH Min@100KHz 100mV 8mA Bias


&工作温度范围: -40°C ~ +85°C

&存储温度范围: -50°C ~ +125°C

电气特性在+25° C, 除非有特殊说明

圈比	电感	耐压	插入损耗		回输损耗		串抗		共模扼制比	
@100KHz 100mV	@100KHz 100mV 8mA Bias uH Min	Vrms Min 2mA 60S	@0.1MHz dB Max	@ 1-125 MHz dB Max	@ 0.1- 40 MHz dB Min	@40~100 MHz dB Min	@1MHz dB Min	@10~100M dB Min	@2MHz dB Min	@30~200 MHz dB Min
1:1±3%	350	1500	-1.2	-1.4	-16	-10	-55	-35	-42	-15

机械图

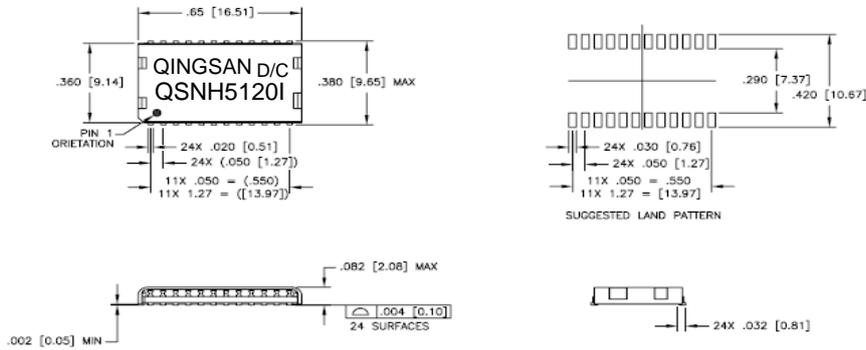

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.
XX= ±.01 [±0.25]
.XXX= ±.005 [±0.13]

电路原理图

